

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**


**This Page Blank (uspto)**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : <b>A61B 5/00, 5/02</b>	<b>A1</b>	(11) International Publication Number: <b>WO 97/12544</b> (43) International Publication Date: 10 April 1997 (10.04.97)
<p>(21) International Application Number: PCT/US96/16001</p> <p>(22) International Filing Date: 4 October 1996 (04.10.96)</p> <p>(30) Priority Data: 60/004,882 6 October 1995 (06.10.95) US 08/691,507 2 August 1996 (02.08.96) US</p> <p>(71) Applicant: TEVITAL, INC. [US/US]; 19 East Central Avenue, Paoli, PA 19301 (US).</p> <p>(72) Inventors: BELLER, Alexander, S.; 25 Springton Pointe Drive, Newtown Square, PA 19073 (US). COLOMBO, Joseph; 12 York Street, Newton, PA 18940 (US). HRIBAR, Adrien, J.; 997 High Pointe Circle, Langhorne, PA 19047 (US). WARNER, Ilene, K.; 113 Diane Drive, Broomall, PA 19008 (US). FABIAN, Frank; 403 Church Hill Road, Kintnersville, PA 18930 (US). MOCENTER, Michael, E.; 3119 Burn Brae Drive, Dresher, PA 19025 (US).</p> <p>(74) Agents: ELMAN, Gerry, J. et al.; Elman &amp; Associates, 20 West Third Street, Post Office Box 1969, Media, PA 19063-8969 (US).</p>	<p>(81) Designated States: European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p><b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: PATIENT TERMINAL FOR HOME HEALTH CARE SYSTEM

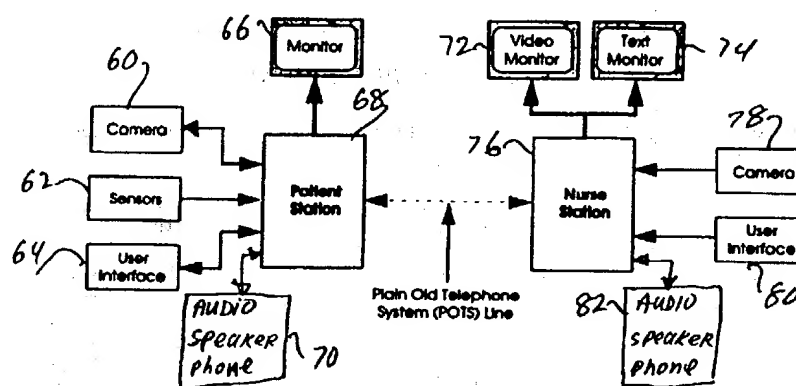

## (57) Abstract

A teleconference system uses video conference between a nurse station (76) and a patient station (68) to deliver medical care. The patient station (68) is programmed to contain customized instructions concerning medications, procedures, or visitations that were placed there by the nurse. The customized audio, video, and text information transforms the patient station (68) into a highly personalized information source which can be reviewed by the patient when the unit is off line. Medical procedures and medications are also programmed into the patient station by the nurse to remind the patient of all scheduled events, including visitations. A record of medical compliance is stored in the patient station, which record is uploaded to the nurse station (76) and compared to the original event schedule. In such manner, the patient station (68) is an intelligent personal medical assistant, programmed by the nurse to provide customized reminders and information necessary for the efficient management of the patient's illness.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## PATIENT TERMINAL FOR HOME HEALTH CARE SYSTEM

## Cross reference to related applications

This application claims priority from provisional application serial no: 60/004882, filed October 6, 1995.

## Field of the invention

The present invention relates to telecommunications and medicine. In particular, the present invention relates to the use of video conferencing and teleconferencing to deliver medical care.

## Background of the invention

In a video conference, two or more people are connected over a telephone line or other suitable two way communications channel, such as POTS, ISDN, CATV, cellular, satellite, radio or fiber optic link. Each participant sees and hears the other party, and in a teleconference generally, may additionally view commonly shared text, diagrams and photographs. Video conferencing equipment has been used for medical purposes, such as for doctor consultation and diagnosis, or routine monitoring by nurses. In addition, it is known to provide sensors to measure the patient's vital signs, such as temperature, pulse rate and blood pressure, and transfer the measurements across the telephone line from the patient station to the doctor or nurse. Other sensors, such as fetal monitors have been used to take measurements on a patient at home (or other remote site such as a hospital, school, clinic, factory, ship or the like), and to transfer the output over the telephone line to the medical office or other health provider locale.

Medical visits by a nurse (or other health care professional such as a therapist, EMT or physician) via video conference or teleconference provides an alternative to office visits by the patient, or to home visits by the nurse. Teleconference visits may be used to check up on patient recovery progress, verify medication compliance, to illustrate to a patient during the electronic visit as to how to perform home care, and the like. A teleconference visit is a convenience to the patient, especially for those patients who would have difficulty traveling to the doctor's office or hospital. A video conference visit, connecting a nurse station to a patient

station via telephone, is more economical than a home visit, thereby providing both convenience and cost savings.

#### Summary of the invention

Video conferencing used for medical visits in the prior art did little more than substitute for a medical visit and provide telemetry of vital signs. The patient station of the present invention provides novel features which extend the functions of video conference equipment to provide functions not available with traditional medical teleconferencing equipment.

Through a five button keypad, the patient has access to a windowed system of instructions and information concerning medications, procedures, or visitations (both electronic and personal), that were placed there by the nurse, either initially or downloaded on line. The instructional video, audio and text is used by the patient and nurse on line, to explain medical procedures during an electronic visit, or to review as necessary afterwards. The customized audio, video and text information transforms the patient station into a highly personalized information source which can be reviewed by the patient when the unit is off line. Thus, when the patient needs to review a procedure again, such as the steps for changing a sterile bandage, the patient can do so at any time at their convenience, at home.

A five button keypad achieves all of the complex functions described herein by the use of notations on the video screen which define and redefine the functions of the keypad buttons. For this purpose, the buttons are disposed adjacent to the video screen whereby the function of each button is defined by the notation appearing on the video screen adjacent to each respective button. In such manner, intuitive ease of operation is provided to the patient.

Patients want information about their illness, and often need reinforcement regarding their own care. In this sense, the patient station of the present invention becomes a personal medical assistant, containing all of the background medical information, the advice of the doctor, and the special instructions which pertain to the particular medical condition of the patient. To provide custom programming of the patient station, the nurse selects appropriate information from a library of audio, video and text material, and enters customized instructions from the doctor's prescriptions, all of which is then downloaded into the patient station.

Customized menu information may be implemented by a linked list data structure. Data screens are represented by a display record containing choices for the patient to make. Each choice in the display record contains

pointers (links) to either an operation or to another display record. An operation can for example, be an instruction such as a canned video clip. The linked list of display records and operations form a system of menu choices and information through which the patient can navigate to find just the advice and information required.

In such manner, the patient station is programmed to become a personal medical assistant, containing customized knowledge for each particular patient.

Medical procedures and medications must often be administered to the patient on a schedule. In many cases, the schedules are complex and a patient may forget a scheduled event. For example, one medication may need to be taken once a day, an hour before a meal, while an other may need be taken three times a day after a meal. Procedures are also scheduled. For example, a surgically installed intravenous tube may need to be flushed once a day, while the site of chest entry of the tube may need a sterile dressing change once a week.

The patient station of the present invention is programmed by the nurse to remind the patient of all scheduled events, including visitations. An alarm sounds at the time of the scheduled event. If not answered, the alarm is rescheduled and becomes more insistent. When the alarm is answered, audio, video or text reminders are presented to the patient. At the same time, information regarding procedures is available to the patient at the touch of a button. Afterwards, the patient confirms that the medication has been taken or the procedure has been performed. A record of compliance is stored in the patient station, which record is uploaded to the nurse station and compared to the original event schedule. Discrepancies can be followed up by the nurse at the next visitation.

A schedule of events (both medication and procedural) may be implemented in a table form. Each entry in the table contains an action entry and a corresponding time entry. In operation, the table is scanned by a real time operating system which scans the table, comparing the time entries to a real time clock. When real time equals or exceeds a table time entry, the corresponding action entered in the table is undertaken. After the action is taken or acknowledged, the entry is marked so that actions will not be unintentionally duplicated.

In such manner, off line as well as on line, the patient station of the present invention is an intelligent personal medical assistant, programmed by the nurse to provide customized reminders and information necessary for the efficient management of the patient's illness in accordance with the

prescriptions and directions of the doctor.

The patient station is easy to use. Only five large buttons are needed to operate the patient station. Additionally, the video camera at the patient station is remotely controlled by the nurse in order to view the patient. The patient assumes a position in front of the patient station which is convenient to the patient. Then nurse then adjusts the video camera to capture an image to make accurate observations. It is more convenient and desirable for the patient that the remote video camera move rather than the patient move. For this purpose, the nurse station in the present system remotely controls the pan, tilt and zoom of the camera at the patient station.

#### Brief description of the drawings

Figure 1 is an isometric view of a patient station in accordance with the present invention.

Figure 2 is a front view of a patient station in accordance with the present invention.

Figure 3 is a side view of a patient station in accordance with the present invention.

Figure 4 is an isometric view of a patient station illustrating the operation of drawers for sensor and medication storage for use with the present invention.

Figure 5 is an isometric view of a patient station illustrating the operation of drawers for temperature and blood pressure sensor storage for use with the present invention.

Figure 6 is a cross sectional view of a patient station illustrating the operation of a sensor drawer for storage of a stethoscope sensor, and the operation of a patient keypad button in accordance with the present invention.

Figure 7 is a cross sectional view of a patient station illustrating the operation of a remotely controlled video camera, and the operation of a patient keypad button in accordance with the present invention.

Figure 8 is a block diagram of a system including a nurse station and a patient station coupled by a telephone line in accordance with the present invention.



Figure 9 is a detail of the video screen view at the nurse station, illustrating video camera controls for pan, tilt and zoom in accordance with the present invention.

Figure 10 is a flow chart of the definition and redefinition of the five button switches 18, 20, 22, 24 and 26 shown in figure 1, in accordance with the present invention.

Figure 11 is a block diagram of a patient station in accordance with the present invention.

Figures 12 and 13 show typical patient information window details as appearing on the nurse station data screen.

Figure 14 shows a data router for discriminating incoming telephone calls intended for the telephone, as compared to incoming calls intended for the patient station.

Figure 15 shows a typical patient station vital signs information as appearing on the nurse station data screen.

Figure 16 is a flow chart diagram illustrating the sequence of programming steps for programming the patient station to contain customized medical information, and customized schedules for medication and medical procedures for each particular patient.

#### Detailed description

A perspective view of the patient terminal 10 with video screen 12 and video camera 14 for the home health care system of the present invention is shown in figure 1. There are four drawers 16A, 16B, 16C and 16D. Each drawer is used for a particular purpose such as to hold a sensor (e.g., thermometer, blood pressure and temperature cuff, stethoscope) or medication. Other types of sensors include a weight scale, EKG, ECG, pulse oximeter, glucometer, and EEG.

Medical sensors are housed in separate drawers which form protective compartments to keep the sensors free of dust and other contaminants. Sensor wires or tubes are positioned to exit at back of the sensor drawer, so that when the sensor drawer is closed, the sensor is protected and an orderly appearance is maintained.

The patient terminal also has five button switches 18, 20, 22, 24 and 26, used for patient input. Four of the buttons 18, 20, 22, 24 are re-

definable by notation appearing on the lower portion of the video screen 12. The fifth button 26 is dedicated as a help button to provide "how to" instructions for the patient. Video screen 12 and its housing 13 rotate about shaft 25 to position both the video screen 12 and the camera 14 for proper view. Front and side views are shown in figures 2 and 3 respectively. An open drawer 16D is shown in figure 3.

The sensor protection aspect of the present mechanical arrangement is shown in figure 5. A thermometer 28 is retrieved by opening drawer 16A and removing thermometer 28 which is attached by extensible coiled cord 30. Extensible coiled cord 30 is connected to the patient station through the rear of drawer 16A so that when the thermometer is replaced in drawer 30 there are no dangling wires, and the sensor itself is kept clean.

A pressure cuff 29 is similarly kept in drawer 16B. Typically, drawer 16C is used for the stethoscope and the last drawer 16D is typically used to hold medications (which may have sub-compartments to hold separate doses). Other standard sensors as required may be included, or special sensors customized for a specific patient's condition.

A cross-sectional view of the patient terminal is shown in figure 6. The drawer 16C holds an electronic stethoscope sensor 42 and cord 44 through a strain relief 46. The rear panel 48 retains the stethoscope 42, 44 in drawer 16C. Cord 44 exits through the open top of the drawer 16C, but alternatively may exit through the rear panel 48 or bottom or side panels. A representative switch arrangement for switch 18 is also shown in figure 6 (and in somewhat larger detail in figure 7). An electrical switch 36 mounted on housing 13 has a push button 34. The switch panel 18 is a semi-circular member having a protrusion 32 disposed adjacent to button 34 of switch 36. The semi-circular member 18 rests in a support 38. When the semi-circular member 18 is deflected by finger pressure, protrusion 32 contacts button 34, thereby effecting a contact closure within switch 36. Wires 40 communicate the switch closure to the central controller in the patient station.

A detail of the camera 14 is shown in figure 7 in which pan, tilt and zoom controls the position of camera 50 and lens 52. The patient station video camera articulation is controlled from the nurse station video screen. In figure 9, the on-screen camera controls 90 for pan 92, tilt 94 and zoom 96 are shown. The split screen 88 displays the patient in the main portion 84 of the screen and also displays the nurse's own image in the corner 86 as it appears to the patient.

An overall system structure is shown in figure 8. The nurse station 76 includes a camera 78, user interface 80, audio speaker phone 82 and two

monitors 72, 74. One monitor 72 is used for video images of the patient, while the second monitor 74 is used for text.

The patient station 68 includes a camera 60, sensors 62, user interface 64, audio speaker phone 70, and a video monitor. A plain telephone line connects the nurse station to the patient station.

A block diagram of the patient station is shown in further detail in figure 11. A central processor unit 166 is coupled to a memory 160, a real time clock 142, modem 146, video camera 150, video screen 168, sound card 170 and speaker 172. Additionally, the sensors for temperature 28, blood pressure and pulse rate 29, and a stethoscope 42 are coupled to the central processor 166 through a sensor interface 176. Similarly, the switch inputs 18, 20, 22, 24, and 26 are coupled to the central processor 166 through a switch interface 174. The telephone line 140 is coupled to the modem 146 through a personal emergency response system (PERS) 144. The personal emergency response system 144 responsive to a remote alarm 148, to dial a emergency number on telephone line 140 to summon help.

In operation, the nurse station is connected to the patient station via a regular telephone. In an electronic visitation, by video conference or teleconference, the nurse and patient see and hear each other. Additionally, the nurse station transmits data to be downloaded into the patient station. The transmitted data is selected by the nurse from a library of material in accordance with the doctor's instructions and prescriptions, thus being customized to the needs of the particular patient. In particular, schedules of medical events (medications, procedures and the like) are transmitted as medical event schedules by the nurse station to the patient station. Additionally, the nurse station transmits medical information (nurse notes as text, audio, video and/or data) to the patient station for storage.

At the patient station, the medical event scheduler 162 and the nurse notes 164 are held in memory 160. The contents of the medical event scheduler 162 and the nurse notes 164 may either be installed in the patient station at the patient's home through an internal floppy disk reader (not shown) coupled to the central processor 166, or later downloaded to the patient station from the nurse station at any time after installation of the patient station. The patient accesses the medical schedule and nurse notes via the five button 18, 20, 22, 24, 26, keyboard.

The definition and redefinition of the five buttons switches 18, 20, 22, 24 and 26 is shown in the flow chart of figure 10. Each row of five horizontal boxes in figure 10 represents the five buttons. The content of each box represents the redefinition of each switch. The right most button

is always the "how to" button, or the help button.

Initially, the main button menu on the video screen (reference 12 in figure 1) is displayed. The patient may choose to take vital signs 100, view the scheduled events 102, receive nurse notes 104 (medical instructions), or find out how and when 106 to operate the first four buttons. Button 105 not being used, is shown in blank.

If vital signs 100 is chosen from the button menu, then the vital signs button menu is displayed. From there, the patient can choose to operate a thermometer 108, a pressure and pulse cuff 110, a stethoscope 112, or to go back 114 (return) to the previous button menu.

After choosing a sensor, the measure menu comes up. First, the patient chooses the "ready" 118 button after positioning the sensor, which is followed by either "cancel" (for the thermometer or stethoscope) or relax (for the cuff), for the same button 118 depending on which sensor was chosen. After the measurement, the "go back" button 120 returns the patient to the vital signs menu, and thereafter the "go back" button 114 returns the patient from the vital signs menu to the main menu.

If event schedule 102 or nurse notes 104 is chosen from the main button menu, then the buttons are redefined in the event/notes menu to be "page up" 124, "page down" 126 and "play/view" 128. The "how to" button 132 provides instructions on how to use the buttons. Page up or page down step through the medical information selected for downloading by the nurse. Play/view activates the patient station to show video and/or audio clips illustrating how to use an indicated medication or perform a medical procedure. When finished, the patient returns to the main menu by the "go back" button 130.

The nurse station includes menu choices so that the nurse can contact and program the patient station. Starting from a patient list in figure 13, a patient record as in figure 12 is retrieved. The nurse can initiate a teleconference visit with the patient by clicking on the "initiate visit" screen button. During the video conference, the screen button becomes "terminate visit." Privacy measures are provided to assure that the patient consents to accept the conference call before video is activated. During the teleconference, acquired vital signs data are displayed in a window such as shown in figure 15, and records of medical compliance are uploaded from the patient station to the nurse station. The nurse can also initiate a call, without a video conference visit, in order to download a new medical event schedule or new nurse notes.

The process for programming the patient station with customized medical

schedules and instructions is shown in figure 16. The patient record is selected at step 190 and displayed to the nurse. The medical event scheduler is programmed at step 192 by the nurse from the doctor's instructions. For example, if medication is to be taken twice a day with food, the nurse selects appropriate canned instructions for the medication or writes special instructions according to the doctor's prescription.

Similarly, medical instructions appropriate to the patient's condition are selected from a library of instructions at step 194, or special instructions provided by the doctor. The nurse then initiates at step 196 a call (with or without a visitation), and the event schedules and nurse notes (medical instructions) are subsequently downloaded at step 198 to the patient station.

As indicated, medical instructions are available to the patient by operation of the five button: switches 18, 20, 22, 24 and 26 shown in figure 1. A medical event schedule is a list of days, dates and times in which a medical event is due. To execute the medical event schedule 162 (from figure 11) the real time clock 142 is compared to the designated time in the medical event schedule. If real time is at or later than a scheduled medical event, an alarm is set. When the medical event is acknowledged by the patient, the alarm is turned off.

As shown in figure 14, the patient station 186 discriminates between incoming calls 180 on the phone line intended for the telephone 184 from incoming calls intended for the patient station 186. The incoming call is routed in data router 182, which forwards the incoming call to the appropriate destination.

Medical event schedules and nurse notes (medical information) are highly customized to the patient. For example, a nurse note for a diabetic patient may show consisting of a video and audio instruction how to fill a syringe and administer a dose of insulin. For a burn victim, a nurse note on how to change a dressing is appropriate. Similarly, a medical event for a diabetic may be an alarm to take a dose of insulin, while for a burn victim, the scheduled event is a dressing change. In such manner, the patient terminal is a personal medical assistant, educating the patient. At the same time, the patient terminal is a watchful attendant reminding the patient when to take or apply medication, record vital signs, or visit with the nurse by teleconference.

What is claimed is:

1. In a medical teleconference terminal including at least one sensor to make measurements of at least one of the vital signs of a patient and transfer said measurements across a communications link from said medical teleconference terminal, a method comprising:

providing a video screen;

displaying a plurality of notations on said video screen at least one of said plurality of notations corresponding to a medication schedule;

providing plurality of buttons adjacent to said video screen corresponding to said plurality of notations, the function of each of said plurality of buttons being defined by one of said plurality of notations respectively appearing on said video screen;

selecting said medication schedule by activating one of said plurality of buttons corresponding to said medication schedule; and

displaying a schedule of events relating to said medication schedule of said patient.

2. A method in accordance with claim 1, further comprising:

transmitting said medication schedule from a central station to said patient station across said communications link; and

storing said medication schedule at said patient station.

3. A method in accordance with claim 1, further comprising:

displaying a plurality of notations on said video screen at least one of which corresponds to a medication compliance indication;

selecting said medication compliance indication by activating one of said plurality of buttons corresponding to said medication compliance indication;

storing said medication compliance indication responsive to said activating one of said plurality of buttons by said patient in said medical teleconference terminal; and

transmitting said medication compliance indication from said patient

station to said central station across said communications link.

4. In a medical teleconference terminal including at least one sensor to make measurements of at least one of the vital signs of a patient and transfer said measurements across a communications link from said medical teleconference terminal to a central station, a method comprising:

providing a video screen;

displaying a plurality of notations on said video screen at least one of said plurality of notations corresponding to a medical procedure schedule;

providing a plurality of buttons adjacent to said video screen corresponding to said plurality of notations, the function of each of said plurality of buttons being defined by one of said plurality of notations respectively appearing on said video screen;

selecting said medical procedure schedule by activating one of said plurality of buttons corresponding to said medical procedure schedule; and

displaying a schedule of events relating to said medical procedure schedule of said patient.

5. A method in accordance with claim 4, further comprising:

transmitting said medical procedure schedule from said central station to said medical teleconference terminal across said communications link; and

storing said medical procedure schedule at said medical teleconference terminal.

6. A method in accordance with claim 4, further comprising:

displaying a plurality of notations on said video screen at least one of which corresponds to a medical procedure compliance indication;

selecting said medical procedure compliance indication by activating one of said plurality of buttons corresponding to said medical procedure compliance indication;

storing said medical procedure compliance indication responsive to said

activation of said one of said plurality of buttons by said patient in said medical teleconference terminal; and

transmitting said medical procedure compliance indication from said medical teleconference terminal to said central station across said communications link.

7. In a medical teleconference terminal including a plurality of sensors to measure the vital signs of a patient and transfer at least one of the vital signs of said patient to a central station across a communications link from said medical teleconference terminal, a method comprising:

providing a video screen;

providing a plurality of vital sign sensors for measuring said vital signs;

displaying a plurality of notations on said video screen, said plurality of notations corresponding to said plurality of vital sign sensors for measuring said vital signs;

providing plurality of buttons adjacent to said video screen corresponding to said plurality of notations, the function of each of said plurality of buttons being defined by one of said plurality of notations respectively appearing on said video screen;

selecting a vital sign sensor from one of said plurality of vital sign sensors by activating one of said plurality of buttons corresponding to a selected one of said vital sign sensors; and

activating said selected one of said vital sign sensors corresponding to said selected one of said vital signs of said patient.

8. A method in accordance with claim 7, further comprising:

transmitting a set of instructions corresponding to said vital sign sensors from said central station to said medical teleconference terminal across said communications link; and

displaying said set of instructions corresponding to said vital sign sensor responsive to said step of selecting a vital sign sensor at said patient station.

9. A method in accordance with claim 7, further comprising:



storing said vital sign measurement; and

transmitting said vital sign measurement from said medical teleconference terminal to said central station across said communications link.

10. In a medical teleconference system including a nurse station and a patient station, said system having a communications link connecting said nurse station and said patient station, a method comprising:

selecting at said nurse station a set of instructions relating to the medical treatment of said patient;

transmitting said set of instructions from said nurse station to said patient station;

storing said set of instructions at said patient station; and

recalling said set of instructions for review by said patient at said patient station.

11. A method in accordance with claim 10, further comprising:

disconnecting said communication link between said nurse station and said patient station; and

recalling said set of instructions for review by said patient at said patient station.

12. A method in accordance with claim 10, wherein said set of instructions are text instructions.

13. A method in accordance with claim 10, wherein said set of instructions are audio instructions.

14. A method in accordance with claim 10, wherein said set of instructions are video instructions.

15. In a medical teleconference system including a nurse station and a patient station, said system having a communications link connecting said nurse station and said patient station, a method in said nurse station comprising:

selecting at said nurse station a set of instructions relating to the

medical treatment of said patient; and

transmitting said set of instructions from said nurse station to said patient station.

16. In a medical teleconference system including a nurse station and a patient station, said system having a communications link connecting said nurse station and said patient station, said nurse station transmitting a set of instructions relating to the medical treatment of said patient from said nurse station to said patient station, a method in said patient station comprising:

storing said set of instructions at said patient station; and

recalling said set of instructions for review by said patient at said patient station.

17. A method in accordance with claim 16, further comprising:

disconnecting said communication link between said nurse station and said patient station; and

recalling said set of instructions for review by said patient at said patient station.

18. A method in accordance with claim 16, wherein said set of instructions are text instructions.

19. A method in accordance with claim 16, wherein said set of instructions are audio instructions.

20. A method in accordance with claim 16, wherein said set of instructions are video instructions.

21. In a medical teleconference system including a nurse station and a patient station, said system having a communications link connecting said nurse station and said patient station, a method comprising:

selecting at said nurse station a schedule of events relating to the medical treatment of said patient;

transmitting said schedule of events from said nurse station to said patient station;

storing said schedule of events at said patient station; and

sounding an alarm at said patient station in accordance with said schedule of events.

22. A method in accordance with claim 21, further comprising:

disconnecting said communication link between said nurse station and said patient station; and

sounding an alarm at said patient station in accordance with said schedule of events.

23. A method in accordance with claim 21, wherein said alarm includes text instructions.

24. A method in accordance with claim 21, wherein said alarm includes audio instructions.

25. A method in accordance with claim 21, wherein said alarm includes video instructions.

26. In a medical teleconference system including a nurse station and a patient station, said system having a communications link connecting said nurse station and said patient station, a method at said nurse station comprising:

selecting at said nurse station a schedule of events relating to the medical treatment of said patient; and

transmitting said schedule of events from said nurse station to said patient station.

27. In a medical teleconference system including a nurse station and a patient station, said system having a communications link connecting said nurse station and said patient station, said nurse station transmitting a schedule of events relating to the medical treatment of said patient from said nurse station to said patient station, a method at said patient station comprising:

storing said schedule of events at said patient station; and

sounding an alarm at said patient station in accordance with said schedule of events.

28. A method in accordance with claim 27, further comprising:
- disconnecting said communication link between said nurse station and said patient station; and
- sounding an alarm at said patient station in accordance with said schedule of events.
29. A method in accordance with claim 27, wherein said alarm includes text instructions.
30. A method in accordance with claim 27, wherein said alarm includes audio instructions.
31. A method in accordance with claim 27, wherein said alarm includes video instructions.
32. In a medical teleconference system including a nurse station and a patient station, said patient station having a video camera, said system having a communications link connecting said nurse station and said patient station, a method comprising:
- generating at said nurse station a video camera remote control command;
- transmitting said video camera remote control command from said nurse station to said patient station;
- receiving said video camera remote control command at said patient station; and
- positioning said video camera in accordance with said video camera remote control command at said patient station.
33. A method in accordance with claim 32, wherein said video camera command is a pan command.
34. A method in accordance with claim 32, wherein said video camera command is a tilt command.
35. A method in accordance with claim 32, wherein said video camera command is a zoom command.
36. In a medical teleconference system including a nurse station and a

patient station, said patient station having a video camera, said system having a communications link connecting said nurse station and said patient station, a method at said nurse station comprising:

generating at said nurse station a video camera remote control command;  
and

transmitting said video camera remote control command from said nurse station to said patient station.

37. In a medical teleconference system including a nurse station and a patient station, said patient station having a video camera, said system having a communications link connecting said nurse station and said patient station, said nurse station transmitting a video camera remote control command from said nurse station to said patient station, a method at said patient station comprising:

receiving said video camera remote control command at said patient station; and

positioning said video camera in accordance with said video camera remote control command at said patient station.

38. A method in accordance with claim 37, wherein said video camera command is a pan command.

39. A method in accordance with claim 37, wherein said video camera command is a tilt command.

40. A method in accordance with claim 37, wherein said video camera command is a zoom command.

41. In a medical teleconference terminal including at least one sensor to make measurements of at least one of the vital signs of a patient and transfer said measurements across a communications link from said medical teleconference terminal, an apparatus comprising:

a video screen;

a plurality of notations displayed on said video screen at least one of said plurality of notations corresponding to a medication schedule;

a plurality of buttons adjacent to said video screen corresponding to said plurality of notations, the function of each of said plurality of

buttons being defined by one of said plurality of notations respectively appearing on said video screen;

means responsive to one of said plurality of buttons for selecting said medication schedule by activating said one of said plurality of buttons corresponding to said medication schedule; and

means for displaying on said video screen a schedule of events relating to said medication schedule of said patient.

42. An apparatus in accordance with claim 41, further comprising:

means for transmitting said medication schedule from a central station to said patient station across said communications link; and

means for storing said medication schedule at said patient station.

43. An apparatus in accordance with claim 41, further comprising:

means for displaying a plurality of notations on said video screen at least one of which corresponds to a medication compliance indication;

means for selecting said medication compliance indication by activating one of said plurality of buttons corresponding to said medication compliance indication;

means for storing said medication compliance indication responsive to said activating one of said plurality of buttons by said patient in said medical teleconference terminal; and

means for transmitting said medication compliance indication from said patient station to said central station across said communications link.

44. In a medical teleconference terminal including at least one sensor to make measurements of at least one of the vital signs of a patient and transfer said measurements across a communications link from said medical teleconference terminal, an apparatus comprising:

a video screen;

a plurality of notations displayed on said video screen at least one of said plurality of notations corresponding to a medical procedure schedule;

a plurality of buttons adjacent to said video screen corresponding to said plurality of notations, the function of each of said plurality of buttons being defined by one of said plurality of notations respectively appearing on said video screen;

means responsive to one of said plurality of buttons for selecting said medical procedure by activating said one of said plurality of buttons corresponding to said medical procedure; and

means for displaying on said video screen a schedule of events relating to said medical procedure schedule of said patient.

45. An apparatus in accordance with claim 44, further comprising:

means for transmitting said medical procedure schedule from said nurse station to said patient station across said communications link; and

means for storing said medical procedure schedule at said patient station.

46. An apparatus in accordance with claim 44, further comprising:

means for displaying a plurality of notations on said video screen at least one of which corresponds to a medical procedure compliance indication;

means for selecting said medical procedure compliance indication by activating one of said plurality of buttons corresponding to said medical procedure compliance indication;

means for storing said medical procedure compliance indication responsive to said activation of said one of said plurality of buttons by said patient in said medical teleconference terminal; and

means for transmitting said medical procedure compliance indication from said patient station to said nurse station across said communications link.

47. In a medical teleconference terminal including a plurality of sensors to measure the vital signs of a patient and transfer at least one of the vital signs of said patient to a central station across a communications link from said medical teleconference terminal, an apparatus comprising:

a video screen;

a plurality of vital sign sensors for measuring said vital signs;

means for displaying a plurality of notations on said video screen, said plurality of notations corresponding to said plurality of vital sign sensors for measuring said vital signs;

means for providing plurality of buttons adjacent to said video screen corresponding to said plurality of notations, the function of each of said plurality of buttons being defined by one of said plurality of notations respectively appearing on said video screen;

means for selecting a vital sign sensor from one of said plurality of vital sign sensors by activating one of said plurality of buttons corresponding to a selected one of said vital sign sensors; and

means for activating said selected one of said vital sign sensors corresponding to a selected one of said vital signs of said patient.

48. An apparatus in accordance with claim 47, further comprising:

means for transmitting a set of instructions corresponding to said vital sign sensors from said central station to said medical teleconference terminal across said communications link; and

means for displaying said set of instructions corresponding to said vital sign sensor responsive to said means for selecting a vital sign sensor at said patient station.

49. An apparatus in accordance with claim 47, further comprising:

means for storing said vital sign measurement; and

means for transmitting said vital sign measurement from said medical teleconference terminal to said central station across said communications link.

50. In a medical teleconference system including a nurse station and a patient station, said system having a communications link connecting said nurse station and said patient station, an apparatus comprising:

means for selecting at said nurse station a set of instructions relating to the medical treatment of said patient;

a transmitter for transmitting said set of instructions from said nurse



station to said patient station;

a memory for storing said set of instructions at said patient station;  
and

means for displaying said set of instructions for review by said patient at said patient station.

51. An apparatus in accordance with claim 50, further comprising:

means for disconnecting said communication link between said nurse station and said patient station; and

means for recalling said set of instructions for review by said patient at said patient station.

52. An apparatus in accordance with claim 50, wherein said set of instructions are text instructions.

53. An apparatus in accordance with claim 50, wherein said set of instructions are audio instructions.

54. An apparatus in accordance with claim 50, wherein said set of instructions are video instructions.

55. In a medical teleconference system including a nurse station and a patient station, said system having a communications link connecting said nurse station and said patient station, an apparatus in said nurse station comprising:

means for selecting at said nurse station a set of instructions relating to the medical treatment of said patient; and

means for transmitting said set of instructions from said nurse station to said patient station.

56. In a medical teleconference system including a nurse station and a patient station, said system having a communications link connecting said nurse station and said patient station, said nurse station transmitting a set of instructions relating to the medical treatment of said patient from said nurse station to said patient station, an apparatus in said patient station comprising:

means for storing said set of instructions at said patient station; and

means for displaying said set of instructions for review by said patient at said patient station.

57. An apparatus in accordance with claim 56, further comprising:

means for disconnecting said communication link between said nurse station and said patient station; and

means for recalling said set of instructions for review by said patient at said patient station.

58. An apparatus in accordance with claim 56, wherein said set of instructions are text instructions.

59. An apparatus in accordance with claim 56, wherein said set of instructions are audio instructions.

60. An apparatus in accordance with claim 56, wherein said set of instructions are video instructions.

61. In a medical teleconference system including a nurse station and a patient station, said system having a communications link connecting said nurse station and said patient station, an apparatus comprising:

means for selecting at said nurse station a schedule of events relating to the medical treatment of said patient;

means for transmitting said schedule of events from said nurse station to said patient station;

means for storing said schedule of events at said patient station; and

means for sounding an alarm at said patient station in accordance with said schedule of events.

62. An apparatus in accordance with claim 61, further comprising:

means for disconnecting said communication link between said nurse station and said patient station; and

means for sounding an alarm at said patient station in accordance with said schedule of events.

63. An apparatus in accordance with claim 61, wherein said alarm includes

text instructions.

64. An apparatus in accordance with claim 61, wherein said alarm includes audio instructions.

65. An apparatus in accordance with claim 61, wherein said alarm includes video instructions.

66. In a medical teleconference system including a nurse station and a patient station, said system having a communications link connecting said nurse station and said patient station, an apparatus at said nurse station comprising:

means for selecting at said nurse station a schedule of events relating to the medical treatment of said patient; and

means for transmitting said schedule of events from said nurse station to said patient station.

67. In a medical teleconference system including a nurse station and a patient station, said system having a communications link connecting said nurse station and said patient station, said nurse station transmitting a schedule of events relating to the medical treatment of said patient from said nurse station to said patient station, an apparatus at said patient station comprising:

means for storing said schedule of events at said patient station; and

means for sounding an alarm at said patient station in accordance with said schedule of events.

68. An apparatus in accordance with claim 67, further comprising:

means for disconnecting said communication link between said nurse station and said patient station; and

means for sounding an alarm at said patient station in accordance with said schedule of events.

69. An apparatus in accordance with claim 67, wherein said alarm includes text instructions.

70. An apparatus in accordance with claim 67, wherein said alarm includes audio instructions.

71. An apparatus in accordance with claim 67, wherein said alarm includes video instructions.

72. In a medical teleconference system including a nurse station and a patient station, said patient station having a video camera, said system having a communications link connecting said nurse station and said patient station, an apparatus comprising:

means for generating at said nurse station a video camera remote control command;

means for transmitting said video camera remote control command from said nurse station to said patient station;

means for receiving said video camera remote control command at said patient station; and

means for positioning said video camera in accordance with said video camera remote control command at said patient station.

73. An apparatus in accordance with claim 72, wherein said video camera command is a pan command.

74. An apparatus in accordance with claim 72, wherein said video camera command is a tilt command.

75. An apparatus in accordance with claim 72, wherein said video camera command is a zoom command.

76. In a medical teleconference system including a nurse station and a patient station, said patient station having a video camera, said system having a communications link connecting said nurse station and said patient station, an apparatus at said nurse station comprising:

means for generating at said nurse station a video camera remote control command; and

means for transmitting said video camera remote control command from said nurse station to said patient station.

77. In a medical teleconference system including a nurse station and a patient station, said patient station having a video camera, said system having a communications link connecting said nurse station and said patient station, said nurse station transmitting a video camera remote control command

from said nurse station to said patient station, an apparatus at said patient station comprising:

means for receiving said video camera remote control command at said patient station; and

means for positioning said video camera in accordance with said video camera remote control command at said patient station.

78. An apparatus in accordance with claim 77, wherein said video camera command is a pan command.

79. An apparatus in accordance with claim 77, wherein said video camera command is a tilt command.

80. An apparatus in accordance with claim 77, wherein said video camera command is a zoom command.

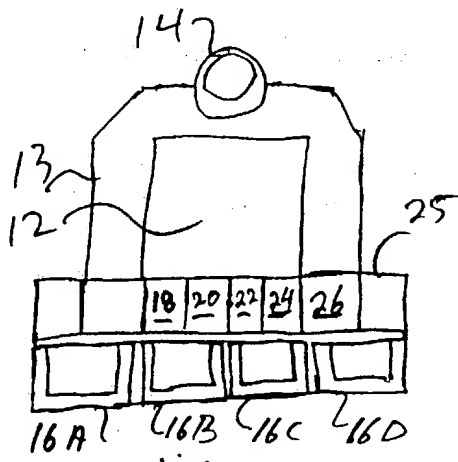


FIG 2

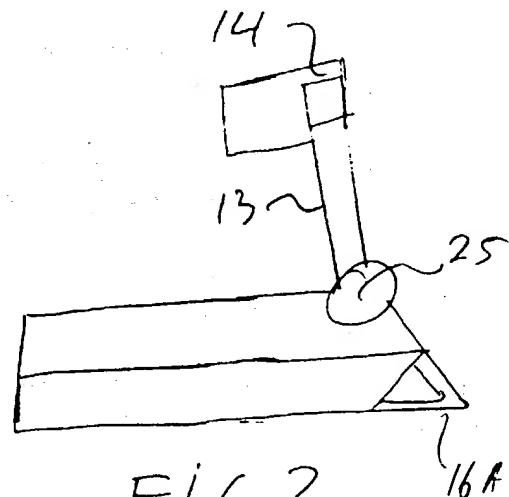


FIG 3

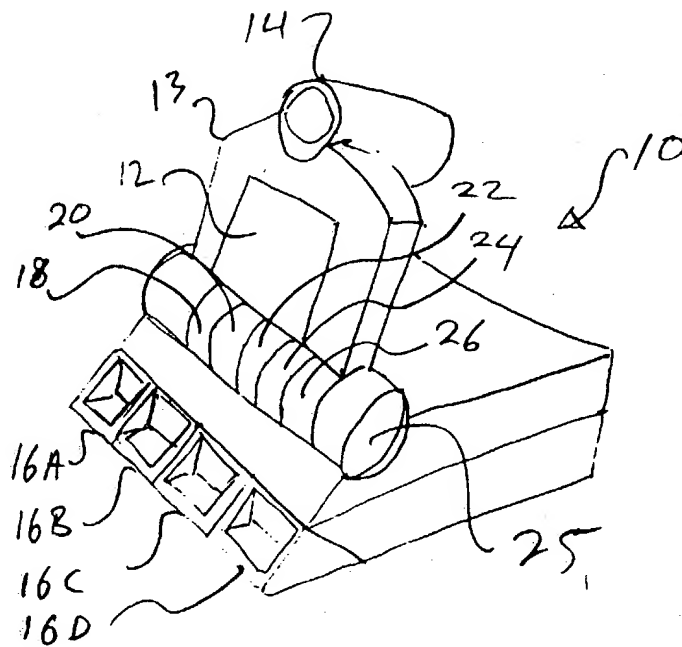


FIG 1

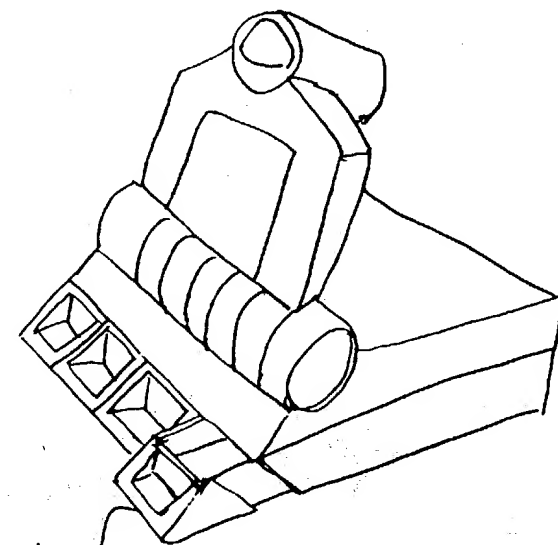


FIG 4

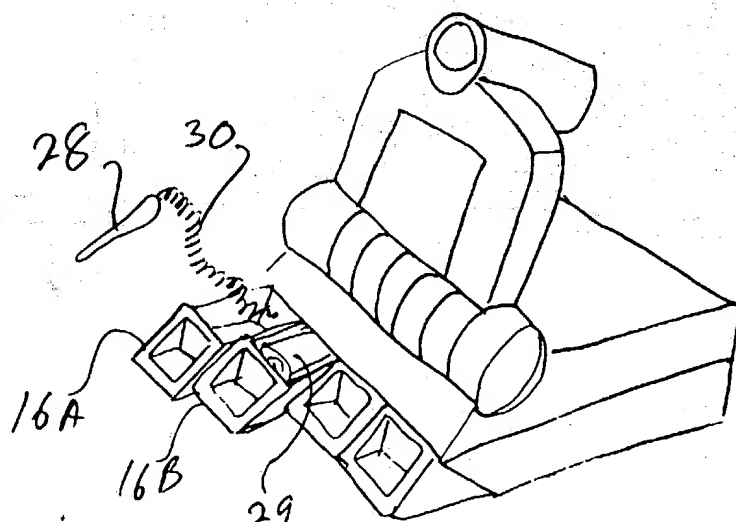


FIG 5

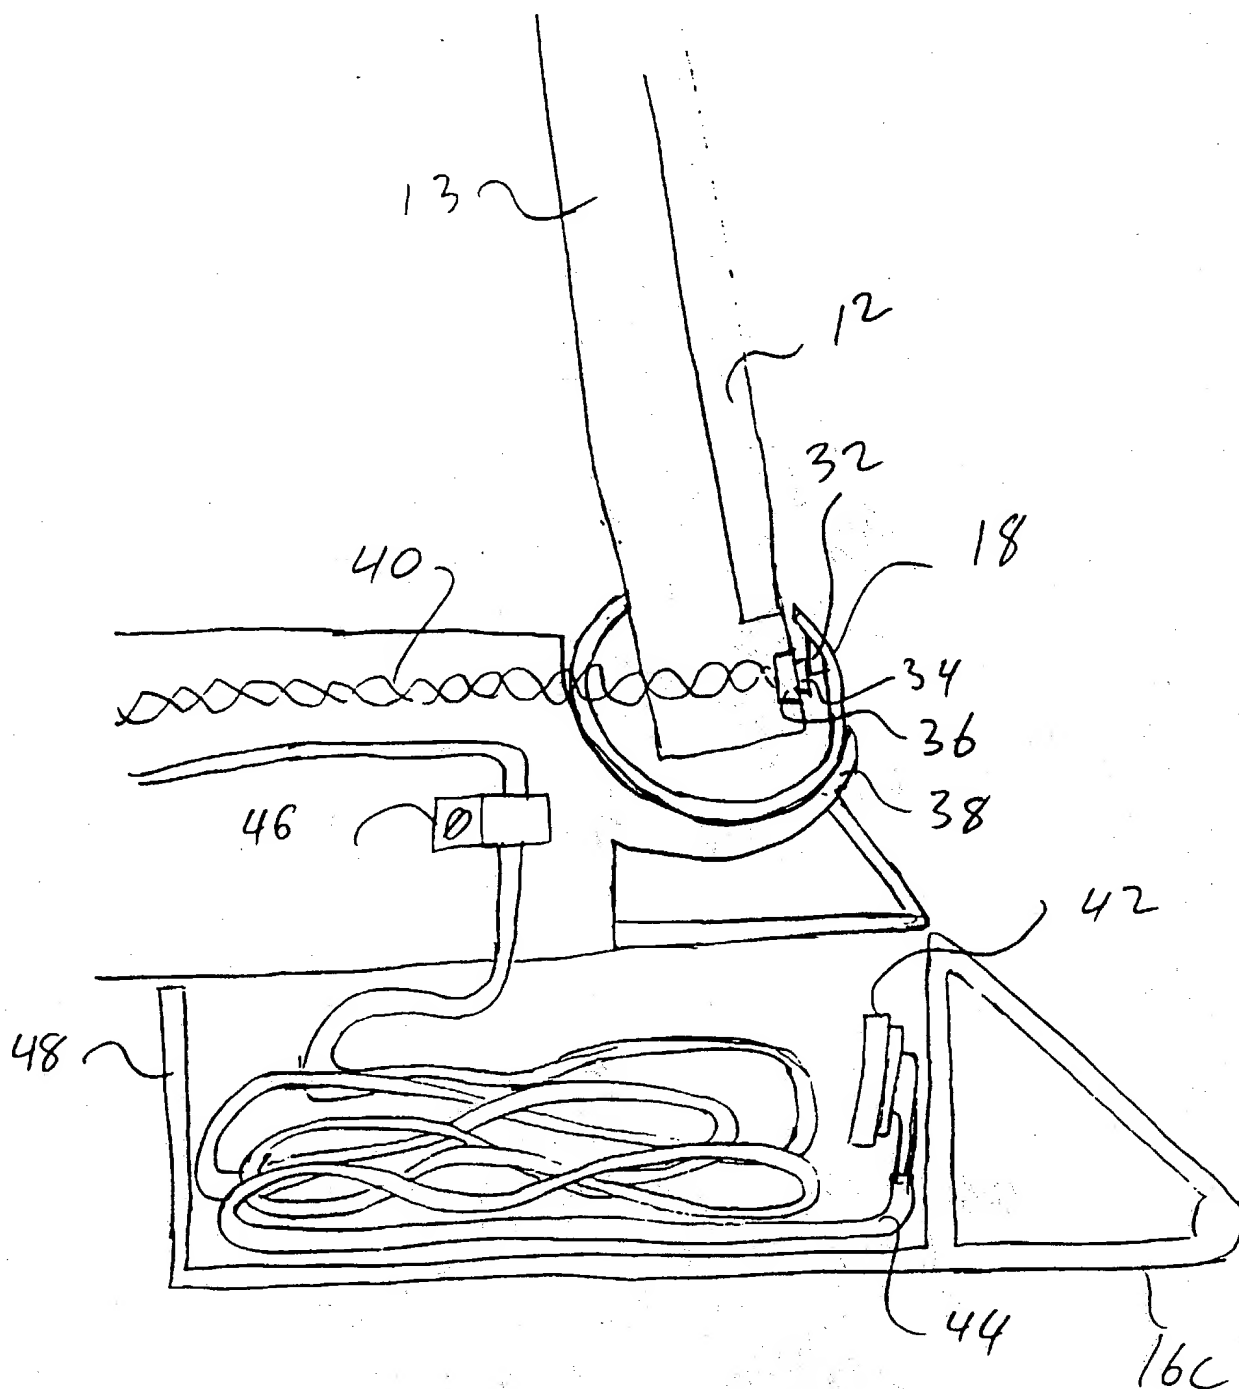


FIG 6



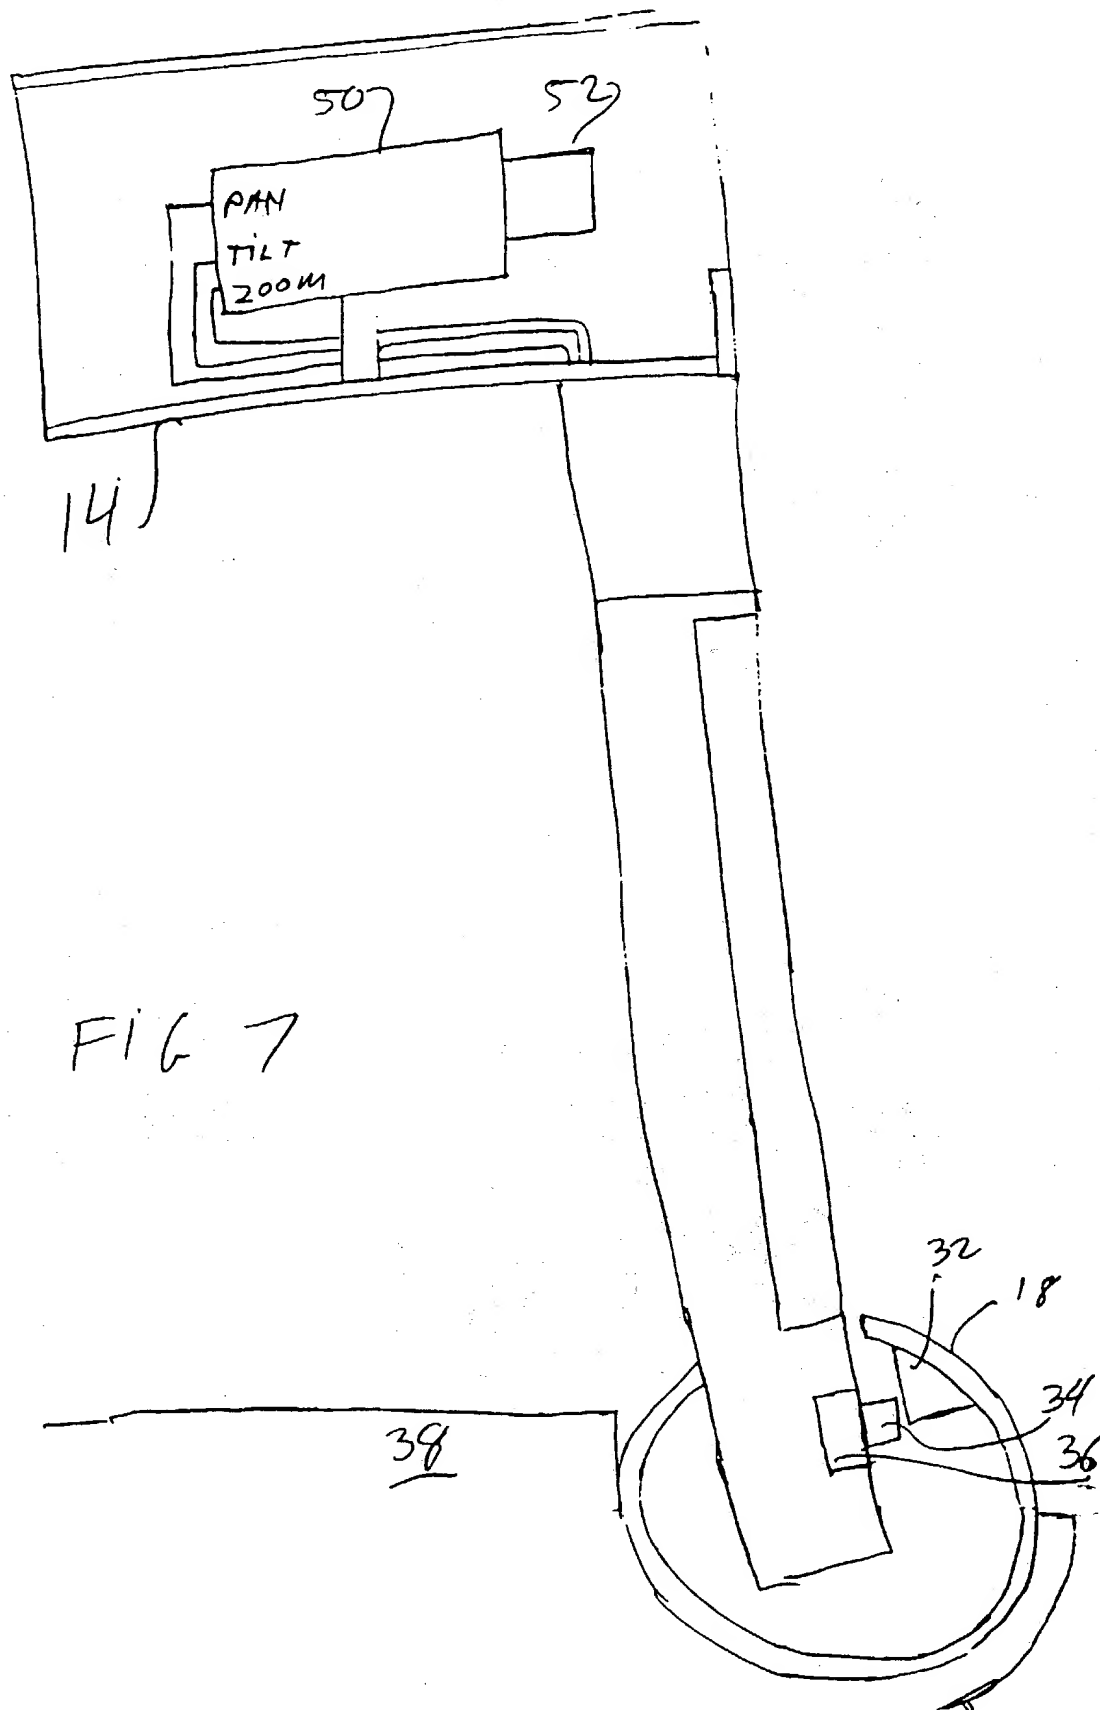
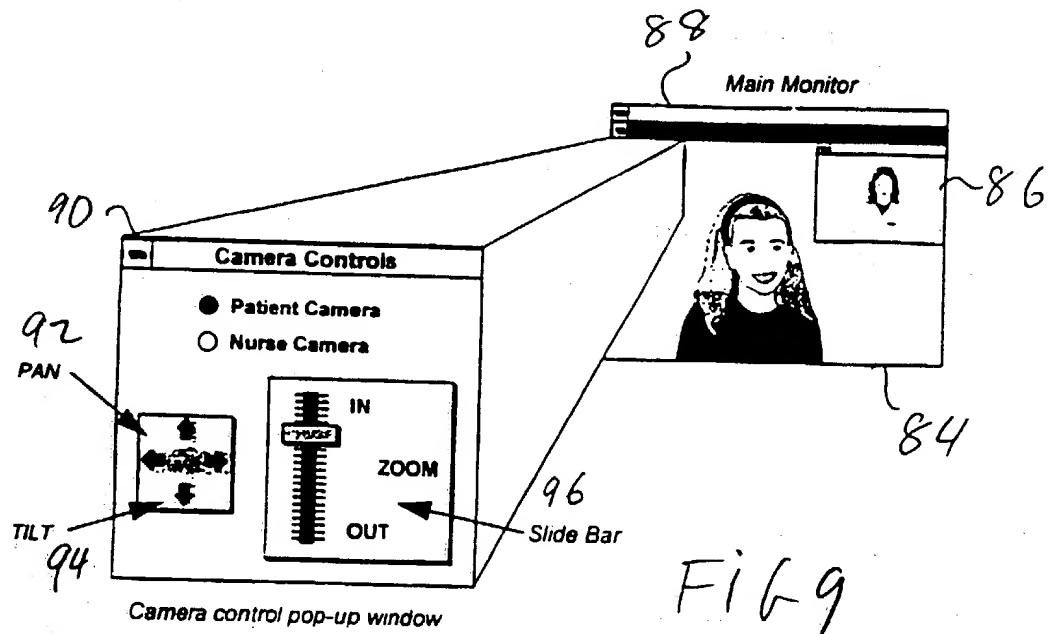
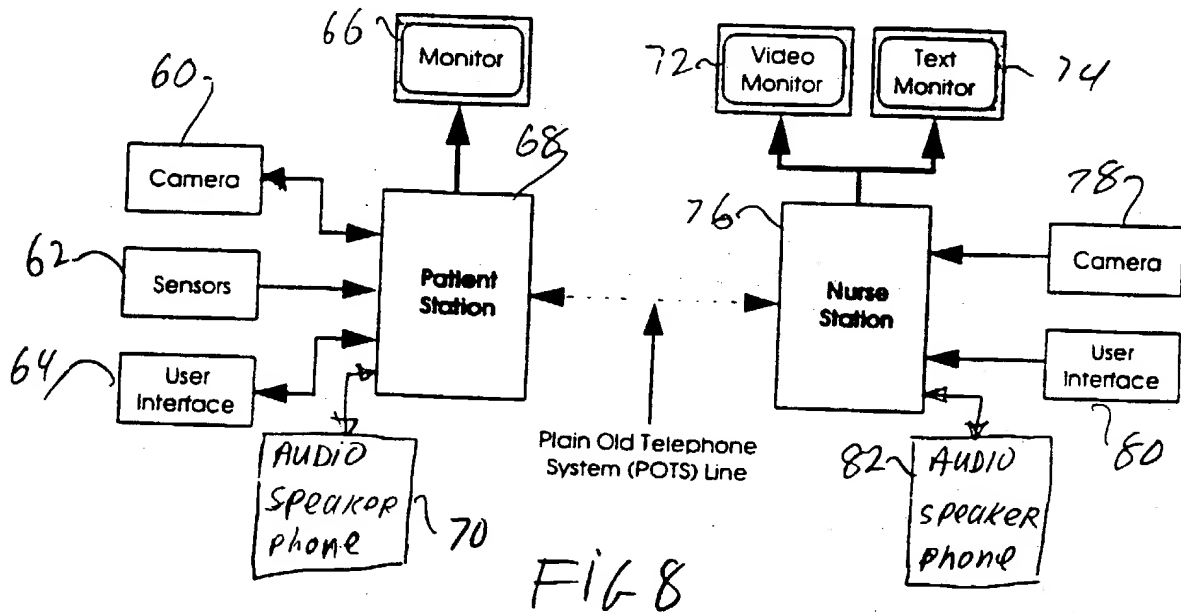
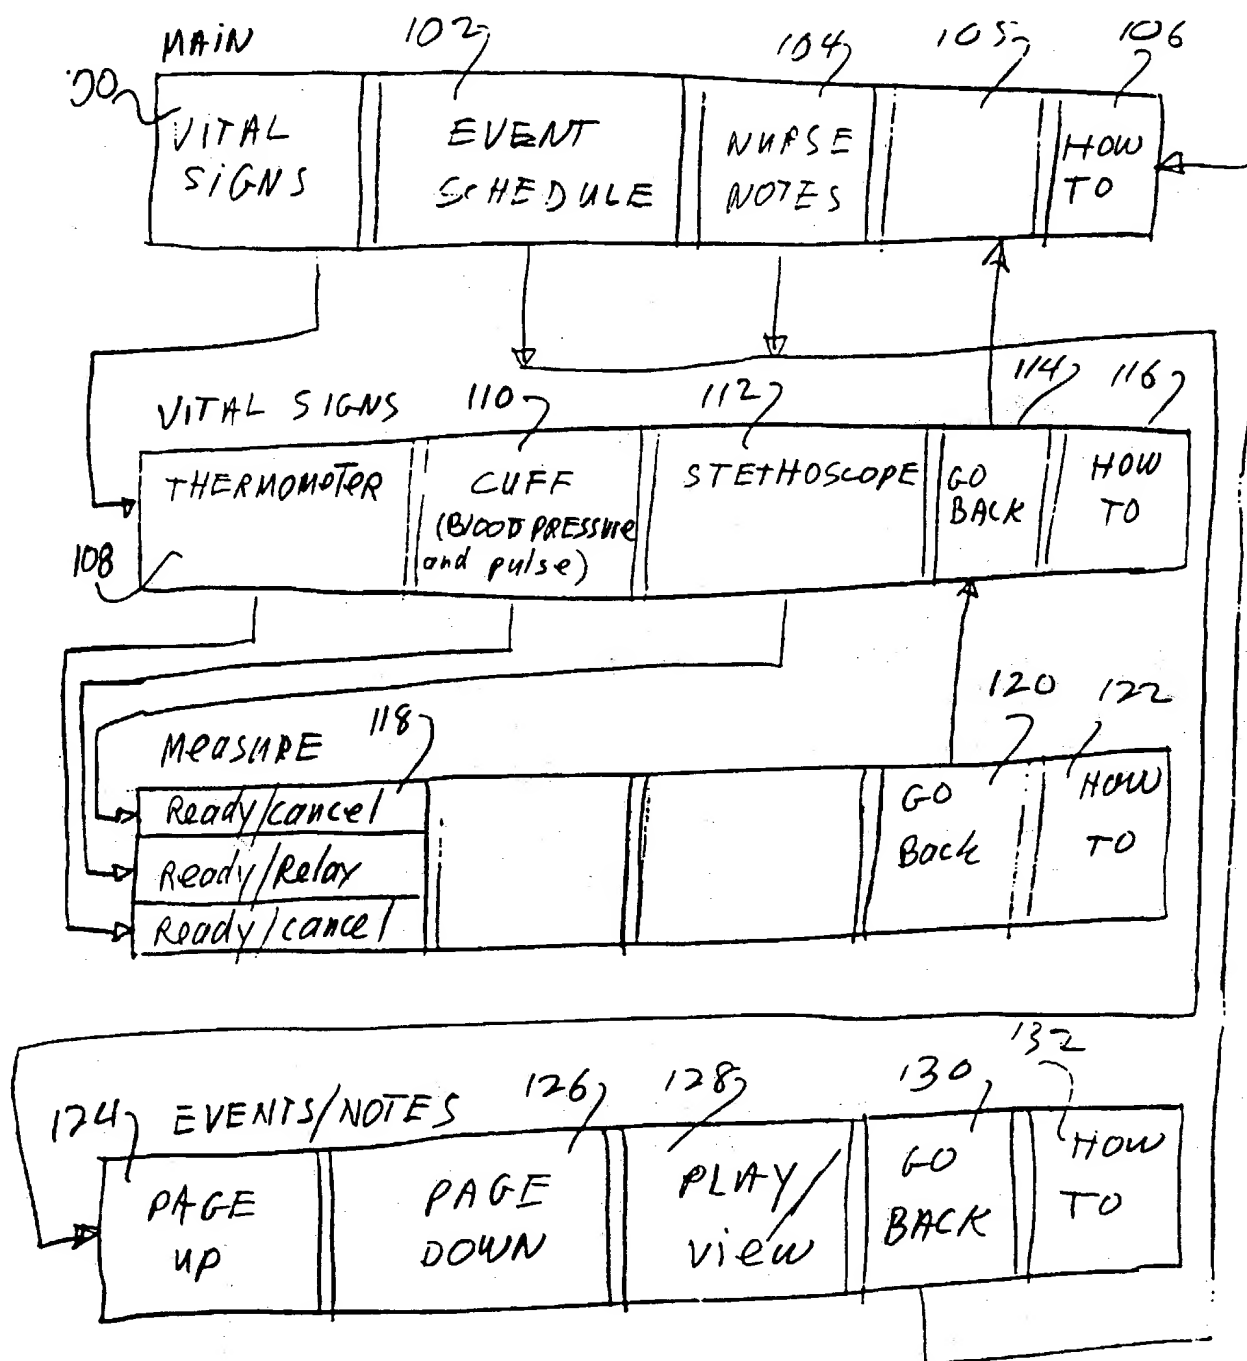


FIG 7





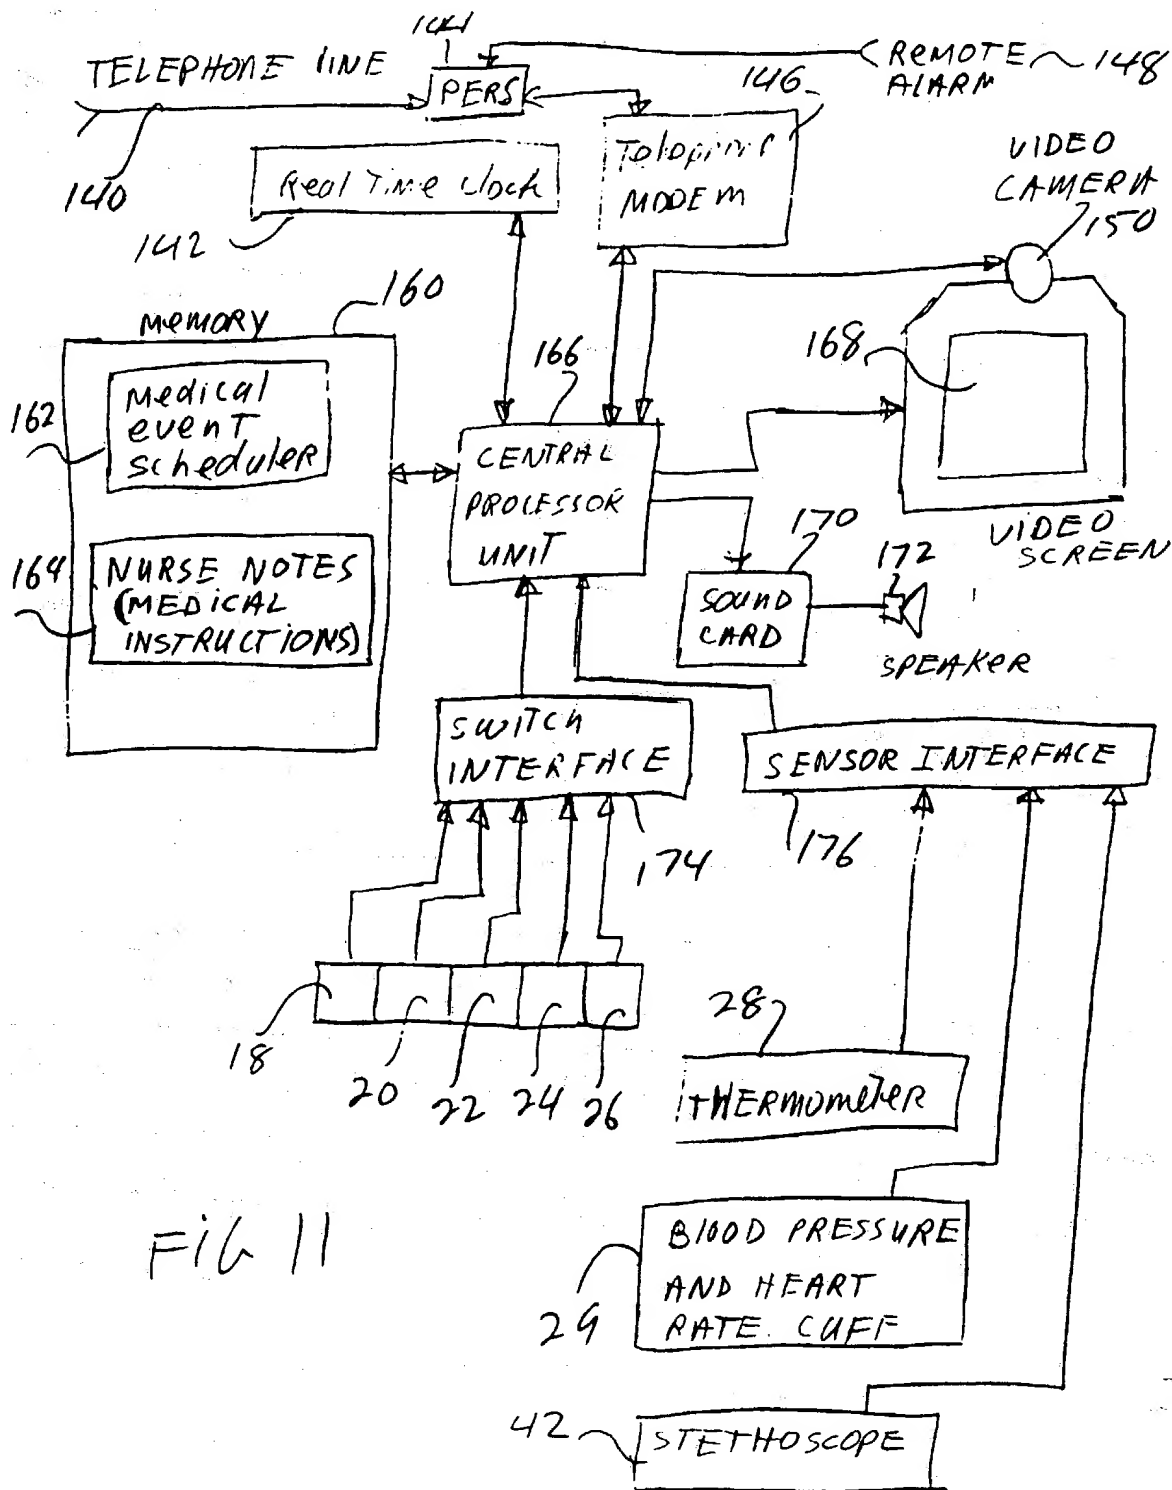


FIG 11

**Patient Medical Record**

Jones, Bob

**General Medical Information / History**

\_\_\_\_\_

**Record of Visits / Treatments**

Date of Visit \_\_\_\_\_

Service Performed \_\_\_\_\_

Data Collection BP \_\_\_\_\_

HR \_\_\_\_\_

Temp \_\_\_\_\_

Date of Visit \_\_\_\_\_

Service Performed \_\_\_\_\_

Data Collection BP \_\_\_\_\_

**Save Record** **Close Window**

**Initiate Visit** **Open Billing Record**

**Terminate Visit** *Button changes when connected*

FIG 12

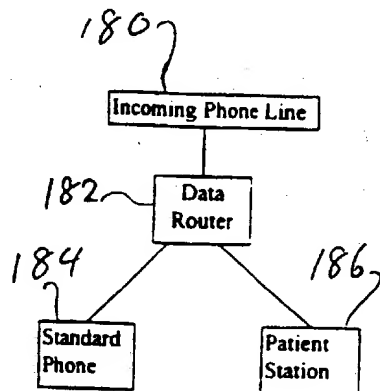


FIG 14

**Patient List**

Select or Type Patient Name

Jones, Bob

Doe, John

Hall, Carter

~~Jones, Bob~~

Jones, Jack

Parker, Peter

Richards, Reed

Smith, Sally

FIG 13

**Patient Station Data**

Status of Connection **Connected**

Blood Pressure **120/80**

Heart Rate **60**

Temperature **98.5**

Stethoscope **Filename**

Only after review by a trained medical professional **Record Stethoscope**

FIG 15

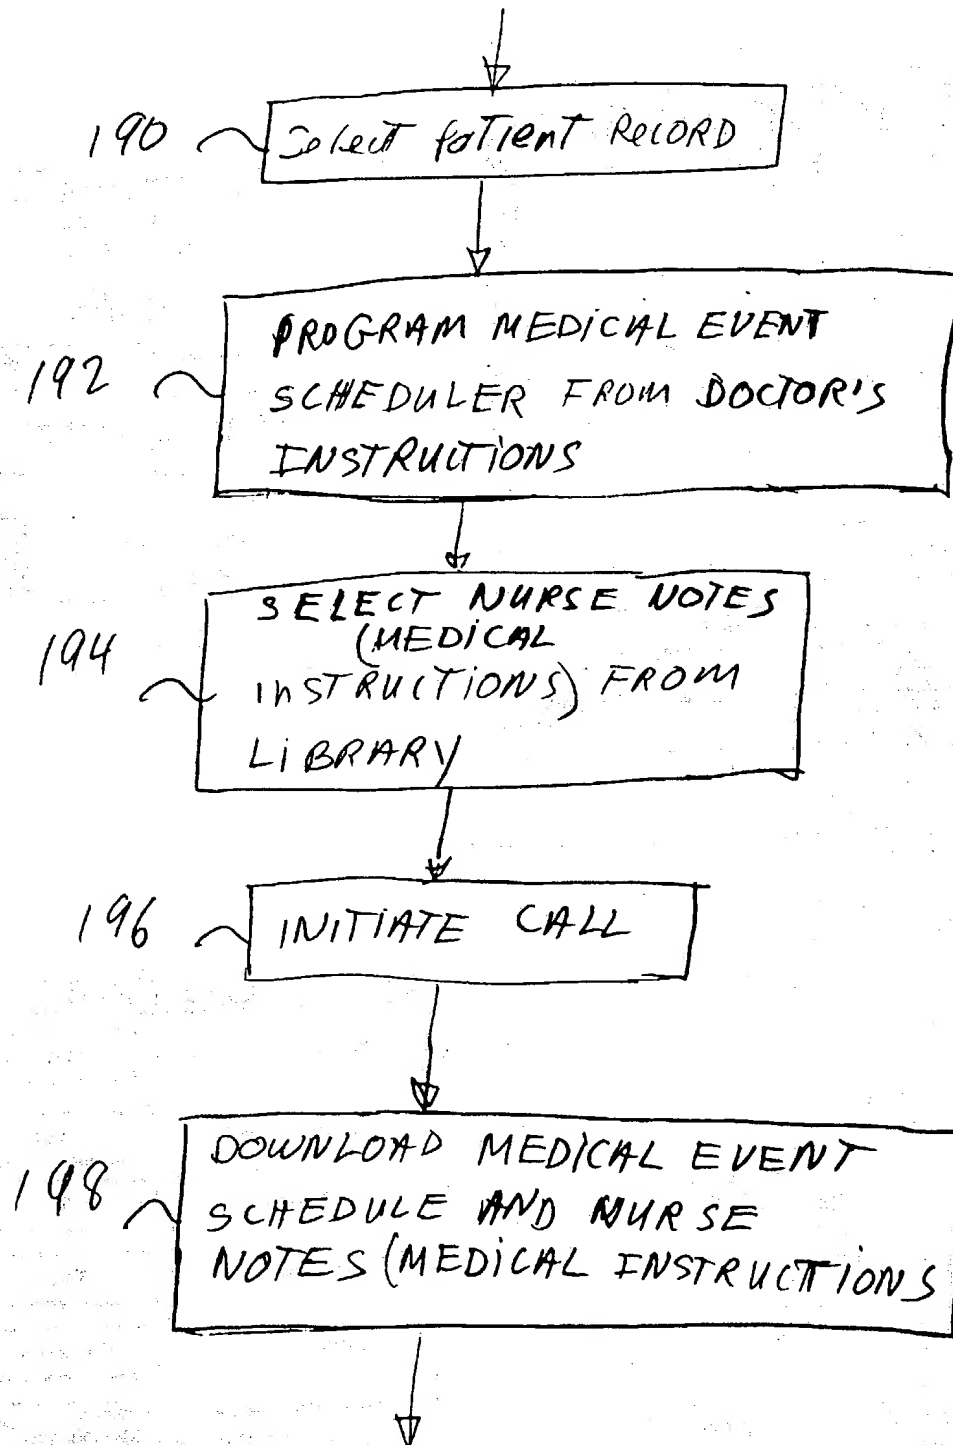


Fig 16

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US96/16001

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC(6) : A61B 5/00, 02 US CL : 128/630, 670 According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) U.S. : 128/630, 670 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X, P ----- Y, P	US 5,553,609 A (CHEN et al) 10 September 1996, entire document.	32/40, 72-80 ----- 1-4, 7, 41-44
Y	US 5,329,459 A (KAUFMAN et al) 12 July 1994, entire document.	1-4, 7, 41-44
Y	US 5,339,821 A (FUGIMOTO) 23 August 1994, entire document.	7, 9, 44, 47, 49
A	US 5,454,722 A (HOLLAND et al) 03 October 1995, entire document.	1-31, 41-71
A	US 4,803,625 A (FU et al) 07 February 1989, entire document.	1-31, 41-71
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document published on or after the international filing date "I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family	
Date of the actual completion of the international search 24 JANUARY 1997		Date of mailing of the international search report 21 FEB 1997
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3590		Authorized officer <i>For</i> BRYAN YARNELL Telephone No. (703) 308-3173

**This Page Blank (uspto)**